



## Modular ice maker - Sprayer system Daily production up to 160 kg

Hotel	████████████████████
Restaurant	██████████████████
Fast food	██████████████
Bar	████████████████████
Disco	████████████████████
Fish market	██████████████
Supermarket	██████████████
Medical & SPA	██████████████
Industry	██████████████

### ► Position n°



### ► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surfaces
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages



AISI 304 SS  
Scotch Brite finish




Removable and  
cleanable air filter

### ► Usable Bins

- Bin 240PE
- Bin 200
- Bin 350

### ► Available ice cube size

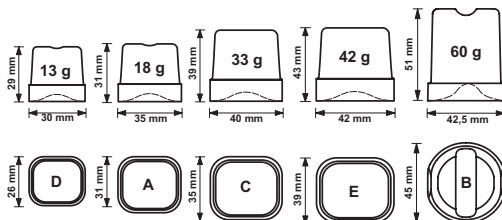

### ► Prod. 24h

Air temp.	Water temp.		Kg	Lbs	
	7° C	45° F			10° C
21° C	70° F	15° C	60° F	155	342


**2 Years Warranty**  
subject to limitations

### ► Certifications available for this model





Ice Cube

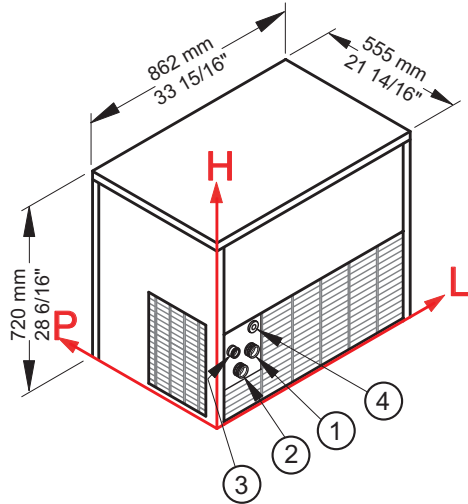**C 150****Modular ice maker - Sprayer system**  
Daily production up to 160 kg**► Working conditions**

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

**► Performances**

	Air temperature	Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
	10° C	160 kg					
	50° F		353 lbs				
	21° C			155 kg			
	70° F				342 lbs		
	32° C					132 kg	
	90° F						291 lbs

**► Connections**

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 126 mm / 4 15/16" - 284 mm / 11 3/16" - 3/4"  
 ② Cond. water in.: 94 mm / 3 11/16" - 234 mm / 9 3/16" - 3/4"  
 ③ Water out.: 69 mm / 2 11/16" - 297 mm / 11 11/16" - 24 mm / 15/16"  
 ④ Electrical connections: 140 mm / 5 8/16" - 355 mm / 14"

**► Technical information**

Production in 24h	155 kg / 342 lbs	Water consumption	A: 2,6 l/kg - 31,1 gal/100 lbs
Cooling system	A - W		W: 13 l/kg - 155,8 gal/100 lbs
Kind of cube	A-18g, C-33g, D-13g, E-42g, B-60g	Sizes (L-P-H mm)	862 - 555 - 720
Refrigerant	R404A - R452A	(L-P-H in)	33 15/16 - 21 14/16 - 28 6/16
Standard voltage	220-240 V ~ 50 Hz	Sizes with pack (L-P-H mm)	910 - 605 - 955
Average power consumption	1400 W	(L-P-H in)	35 13/16 - 23 13/16 - 37 10/16
Fuse	16 A	Net weight	118 kg / 260 lbs
Finish	AISI 304 stainless steel, scotch brite	Gross weight	128 kg / 282 lbs

All the technical information need to be considered at the following conditions:

Standard Cube (18 g)  
 Ambient temperature +21° C  
 Water temperature +15° C  
 Average power consumption at +43° C (standard voltage)  
 Refrigerant R404A

Models and specifications are subject to change without notice

Rev. 03 - Issued May 2018



[www.bremaice.it](http://www.bremaice.it)  
[info@bremaice.it](mailto:info@bremaice.it)

Bim + Data  
download