



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

ICONIC "45dB"

ABS

COLLECTION SILENCER



GRINDING ONLY 5°
ABOVE ROOM TEMPERATURE

TECHNICAL CHARACTERISTICS 0-500gr/5' Max 3Kg

VOLTAGE: 230V / 220V / 110V
 FREQUENCY: 50HZ / 60HZ
 PHASES: 1(MONOPHASE)
 RPM: 1.300 / 1.600
 CURRENT: 1,5A / 3,5A
 CAPACITOR: 14µF / 40µF
 POWER: 0,25HP / 356W
 PROTECTION RATING: IP21
 MOTOR SUPPLIED WITH THERMAL PROTECTOR
 MAXIMUM OPERATING TIME: 30 MIN.

TEMPERED STEEL GRINDING WHEEL (62HRC) Ø 65MM
 LIFESPAN OF GRINDING WHEELS: 500KG
 HOPPER CAPACITY: 1KG


DOSER CAPACITY: 600G
 DOSER REGULATION: 5/12G
 DOSER LEVER: RIGHT/LEFT
 STOP/START STANDARD VERSION: AUTOMATIC

DIMENSIONS WIDTH X LENGTH X HEIGHT: 210X380X660MM
 WEIGHT: 12KG
 AIR NOISE: 45DB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRC) ø 65mm.

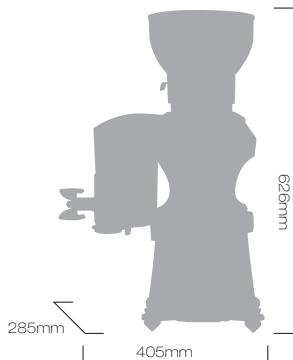

WHITE GREY BLACK RED



MAIN ATTRIBUTES

Hopper (1kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. - Micrometric regulation of the coffee grind using a regulatory pawl. - New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). - Single-bodied, hermetically sealed doser without aroma loss, vibrationless and made of unbreakable material. Ergonomic handle. Universal coffee tamper (rotatable). Doser fitted with gasket-saver (portafilter positioner). - Universal coffee tamper (rotatable) ABS body, two halves specially designed for ventilation and anti-vibration of the body with 7 floating points using pneumatic rings. - Motor set with anti-vibration system and central separator from the motor zone. - Silent 356W motor internally self-ventilated, 45db - Hardened steel grinding blades (62/65 HRC) of 65mm diameter.

Optional: Left or right-handed doser lever. - Coffee counter. - Personalization System with chrome plate on the back of the body and into the funnel. - Admits hopper of 2 kg. Titanium-coated burrs (62/63 HRC) 65mm diameter, 2.000 kg. - Red speed coated burrs (62/63 HRC) 65mm diameter, 3.000 kg.

